

## LN6101 LED HIGH BAY LIGHT



Energy saving LED light and high luminous efficacy

Long lifespan and maintenance free for a long time

Excellent waterproof & dustproof at protection grade IP65


High temperature-resistant design

Anti-shock and anticorrosive structure

### APPLICATIONS

Suitable for industrial plant workshops, warehouses, stations, large-scale constructions, venues, etc.

## TECHNICAL DATA

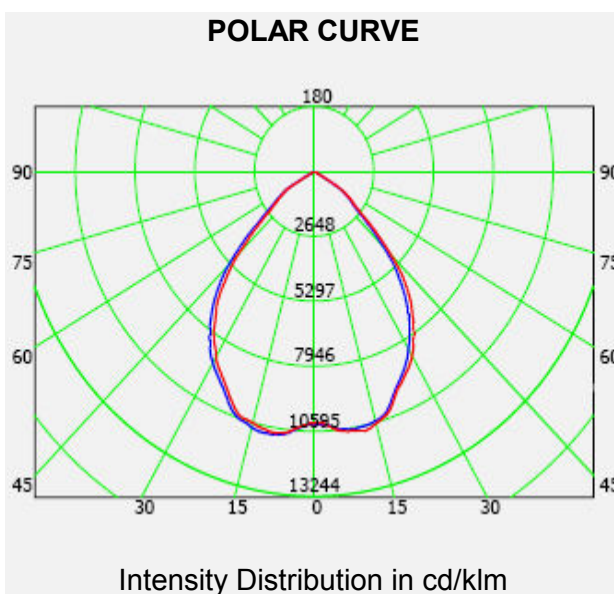

Voltage and Frequency : 100V~277V AC 50/60HZ

Degree of Protection : IP65

Ambient Temperature : -40°C~+55°C

Cabling :  $\phi 6 \sim \phi 8$ mm

Class of Insulation : Class I

Enclosure : Made of Aluminum Alloy

Transparent Cover : Made of Tempered Glass

**CERTIFICATES : CE, SASO APPROVED**

## FEATURES

Application of LED ensures high lighting efficiency, long working life and remarkable energy saving.

Delicately designed seal structure with high protection level of IP65 to stop water and dust from entering into the light source chamber, thus to prevent the light source from aging, light color fading and damage.

Intensive and large space of radiating fins made of alloy enable the light to be at good heat transmission.


Strong structure and selected quality components enable the light to work at high frequency shaking area.

Adopting high quality alloy and high-tech spray coating technique, the lighting fixture is also at excellent rustproof and anticorrosion performance.


## SELECTION TABLE

Model No.	Lamp Type	Lamp Wattage	Luminous Flux	Average Lifespan	Color Temperature	Weight
LN6101	LED	100 W	11000 lm	100000h	3000K~6000K	7 kg
LN6101	LED	150 W	16500 lm	100000h	3000K~6000K	10 kg
LN6101	LED	200 W	22000 lm	100000h	3000K~6000K	12 kg


## LAMPSHADE OPTIONS

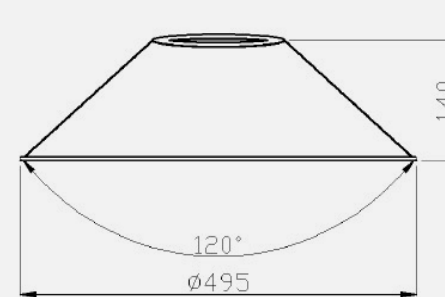

Lampshade A

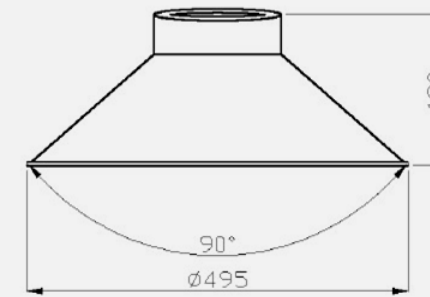


Lampshade B

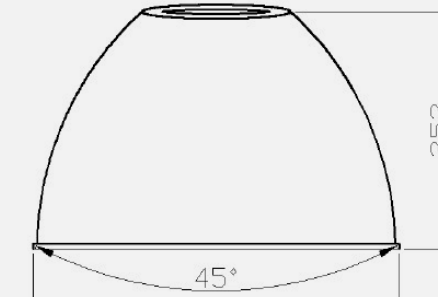

Lampshade C

## MOUNTING DRAWINGS

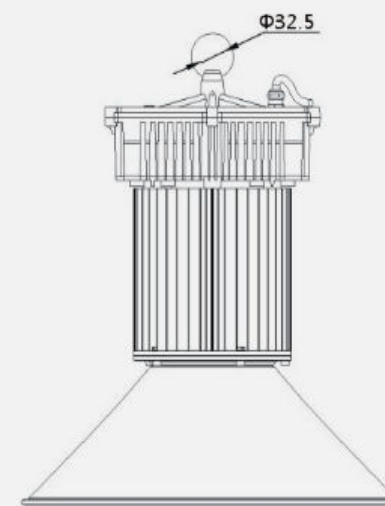

Pendant Mounting by Hook